

SINGLE ROW LINE DRILLS



MULTI-SPINDLE DRILLS FOR ADJUSTABLE SHELVING



R-113

SINGLE ROW MINI DRILL



STANDARD FEATURES:

- 13-Spindle Drill Row
- 10mm Bored Collets, 7 R/H and 6 L/H
- Index Pins
- Manually Operated Down Stroke
- Spring Return Up Stroke
- 0"–1-1/2" Drill Head Stroke
- 20" x 48" Table Area
- 0"–8" Adjustable Backfence Offset
- Leg Set
- 32mm Spindle Centers
- 3/4 H.P. Spindle Drive Motor, T.E.F.C.
- Spring Operated Hold Downs
- 60" Backfence With 4 Adjustable Stops
- (4) Backfence Offset Stops
- 30" x 60" Floor Area
- Wired 1-Phase, 110 Volts
- Manual Motor Control
- Machine Weight: 260 lbs.

OPTIONAL FEATURES:

- 7-Spindle Drill Head With 2" Centers
- 3/4 H.P. 3-Phase Spindle Drive Motor

R-19F

SINGLE ROW LINE DRILL



STANDARD FEATURES:


- 23-Spindle Gear Driven Drill Row
- 10mm Bored Collets, 12 R/H and 11 L/H
- Index Pins
- 0"–3" Pneumatic Drill Head Stroke
- 0"–12" Adjustable Backfence Offset
- Accepts 57mm or 70mm Tool Lengths
- 14" x 48" Table Area
- Wired 3-Phase, 230/460 Volts, 60 Hz.
- Foot Pedal Actuated Stroke
- 32mm Spindle Centers
- 3 H.P. Spindle Drive Motor, T.E.F.C.
- Spring Operated Hold Downs
- 60" Backfence With 4 Adjustable Stops
- (4) Backfence Offset Stops
- 1/4" Filter, Regulator and Lubricator
- Magnetic Motor Control
- Machine Weight: 760 lbs.
- Floor Area: 60" W x 36" D

OPTIONAL FEATURES:

- 13-Spindle Drill Head With 2" Centers
- 2 H.P. 1-Phase Spindle Drive Motor, 220 Volts

R-823VH

HORIZONTAL/VERTICAL LINE DRILL & DOWEL BORER

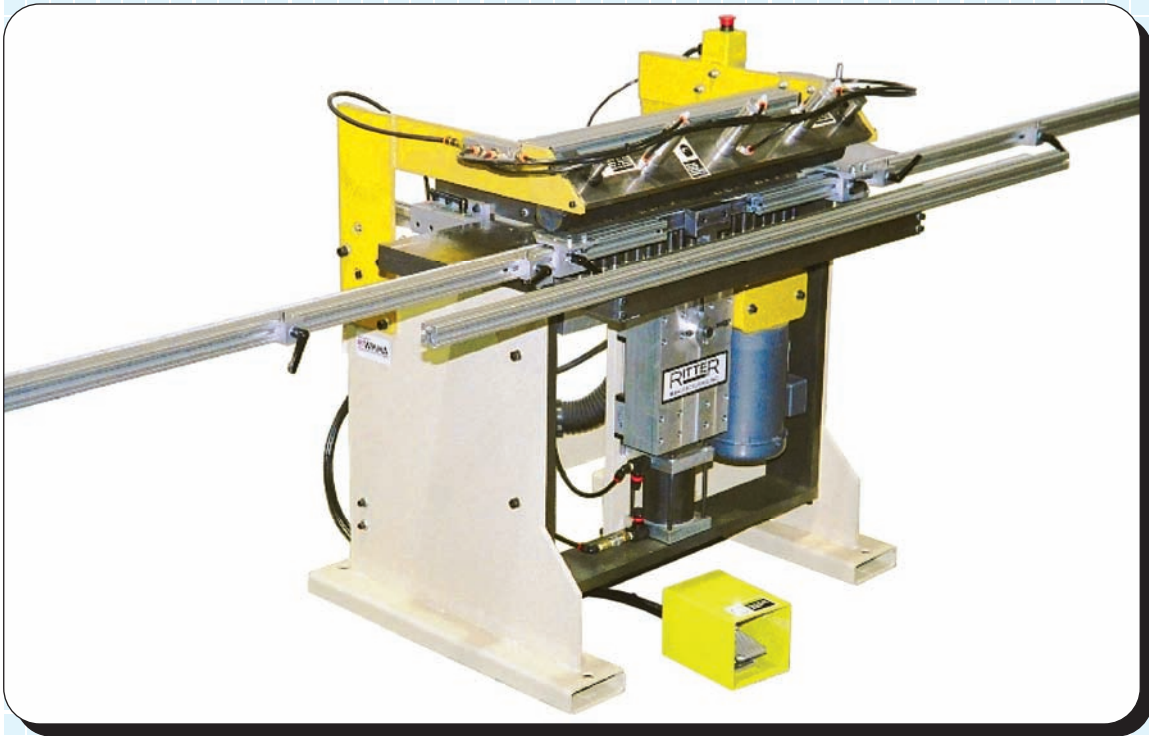

STANDARD FEATURES:

- 23-Spindle Gear Driven Drill Row
- 10mm Bored Collets, 12 R/H and 11 L/H
- Bottom Line Drilling
- Pneumatic Hold Down Bar
- 0"–3" Pneumatic Drill Head Stroke
- 0"–6" Adjustable Backfence Offset
- Depth Control Turret
- Accepts 57mm Tool Lengths
- 8" x 52" Work Table Area
- Wired 3-Phase, 230/460 Volts, 60 Hz.
- Foot Pedal Actuated Stroke
- Floor Area: 48" x 52" Plus Fences
- 32mm Spindle Centers
- 3 H.P. Spindle Drive Motor, T.E.F.C.
- Horizontal and Vertical Dowel Boring
- (2) Dowel Boring Stops
- 72" Backfence With 4 Adjustable Stops
- (4) Backfence Offset Stops
- Above Table Tool Change
- 1/4" Filter, Regulator and Lubricator
- Magnetic Motor Control
- Front Table Extension Bar
- 4" Dust Hood Outlet
- Machine Weight: 1485 lbs.

OPTIONAL FEATURES:

- 2 H.P. 1-Phase, 220 Volt Electronics
- Quick Change Tooling Adapters

DISTRIBUTED BY

RITTER
MANUFACTURING, INC.

1300B West Fourth Street • Antioch, CA 94509
TEL: (925) 757-7296 • FAX: (925) 757-7083
EMAIL: rittermfg@aol.com • WEB: www.rittermfg.com